

MODEL: SC1500SEL_2.0 SOFTEDGE BOTTOM
CUSTOMER: -
ADDRESS: -
CITY & STATE: -
JOB: -
LOCATION: -
COMPANY: -


SIZE: DW=	DH=		
MOTOR LOCATION: RIGHT	LEFT		
CONTROL BOX LOCATION: RIGHT	LEFT		
VOLTAGE: 208V	230-240V	480V	575V
WIRING: NXT	X		

VISION AREA:		
PANEL COLOR: BLUE	ORANGE	RED
YELLOW	GREY	
VISION AREA: CLEAR PVC	NONE	

OPTIONS:	
3 BUTTON PUSH STATION	-
INDUCTION LOOP	-
MOTION DETECTOR	-

NOTES:

1.) STEP DOWN TRANSFORMER REQUIRED FOR SUPPLY VOLTAGES GREATER THAN 480VAC (TO A MAXIMUM OF +5%).

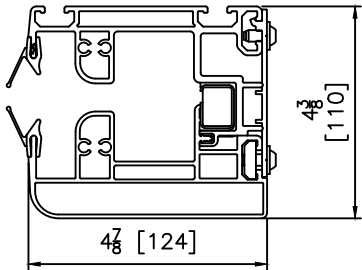

ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].

*FITTING CLEARANCE.


**POSSIBLE CABLE OUTLET POSITION

***EMERGENCY OPENING CLEARANCE (RH OPERATOR SHOWN)

CONTROL BOX PROJECTION IS 6 INCHES [152].

DRAWING SHOWN RIGHT HAND, LEFT HAND OPPOSITE.

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE

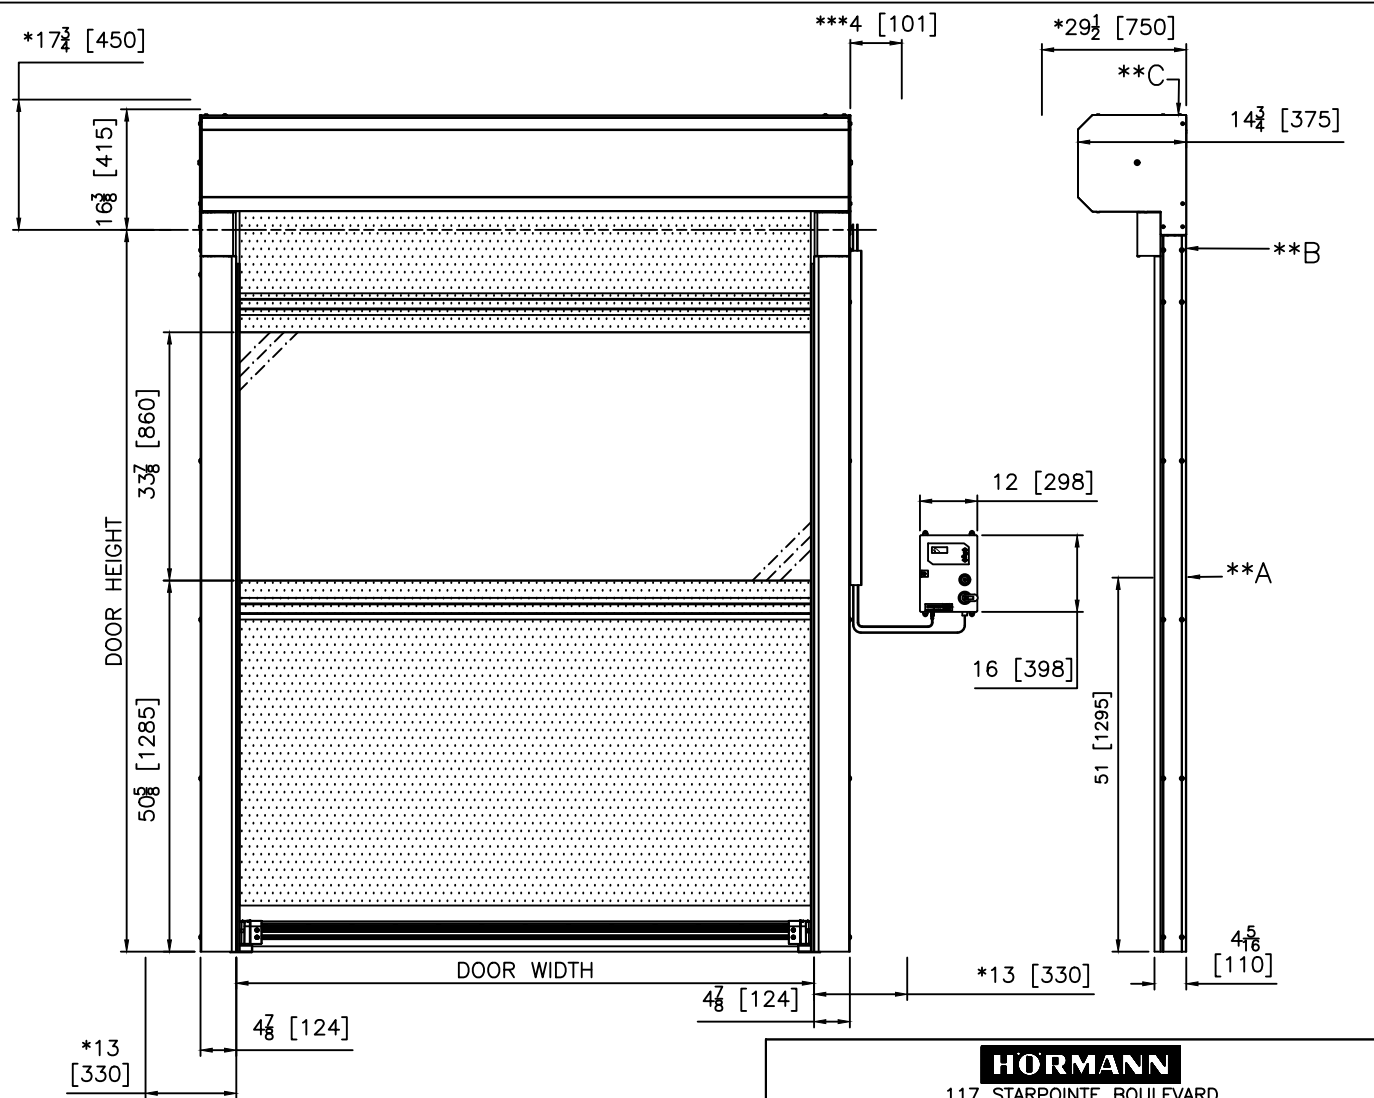

HORMANN		
117 STARPOINTE BOULEVARD BURGETTSTOWN, PA 15021-9506 PH: +1 (800) 365-3667 FAX: 724.385.9151 www.hormann.us		
TITLE: HIGH PERFORMANCE DOOR SPECIFICATIONS		
MODEL: SC1500SEL_2.0 SE	PART #:	
DRAWING #:	PAPER SIZE:	
PAGE:	SCALE:	
QTY:	ENGINEER: GJB	DRAWN: 10/3/2022