


MODEL: STEEL RANGER 9000 WITH HOOD
CUSTOMER: -
ADDRESS: -
CITY & STATE: -
JOB: -
LOCATION: -
COMPANY: -

SIZE: DW=-	DH=-			
MOTOR LOCATION:	RIGHT	LEFT		
CONTROL BOX LOCATION:	RIGHT	LEFT		
CONTROL BOX TYPE:	3PHASE			
VOLTAGE:	<input type="checkbox"/> 208V	<input type="checkbox"/> 230-240V	<input type="checkbox"/> 360-480V	<input type="checkbox"/> 575V
WIRING:	NXT			
VISION AREA:				
WINDOWS: QTY. OF SLATS			STARTING AT	
VENTED: QTY. OF SLATS			STARTING AT	
OPTIONS:				
1 BUTTON PUSH STATION				-
INDUCTION LOOP SYSTEM				-
RADAR MOTION SENSOR				-
NOTES:				

- 1.) STEP UP TRANSFORMER SUPPLIED FOR VOLTAGES UNDER 480VAC.
- 2.) STEP DOWN TRANSFORMER SUPPLIED FOR VOLTAGES OVER 480VAC.



TRACK DETAIL


ALL DIMENSIONS ARE IN INCHES.

* NECESSARY SPACE REQUIREMENT FOR MAINTENANCE.

**SPACE REQUIRED TO FIT AND DISMANTLE THE OPERATOR. CONTROL BOX PROJECTION IS 11 INCHES.

DRAWING SHOWN RIGHT HAND, LEFT HAND OPPOSITE.

*NOTE: GEARBOX HEATER WITH DEDICATED 110VAC POWER SOURCE REQUIRED FOR APPLICATIONS < 40°F

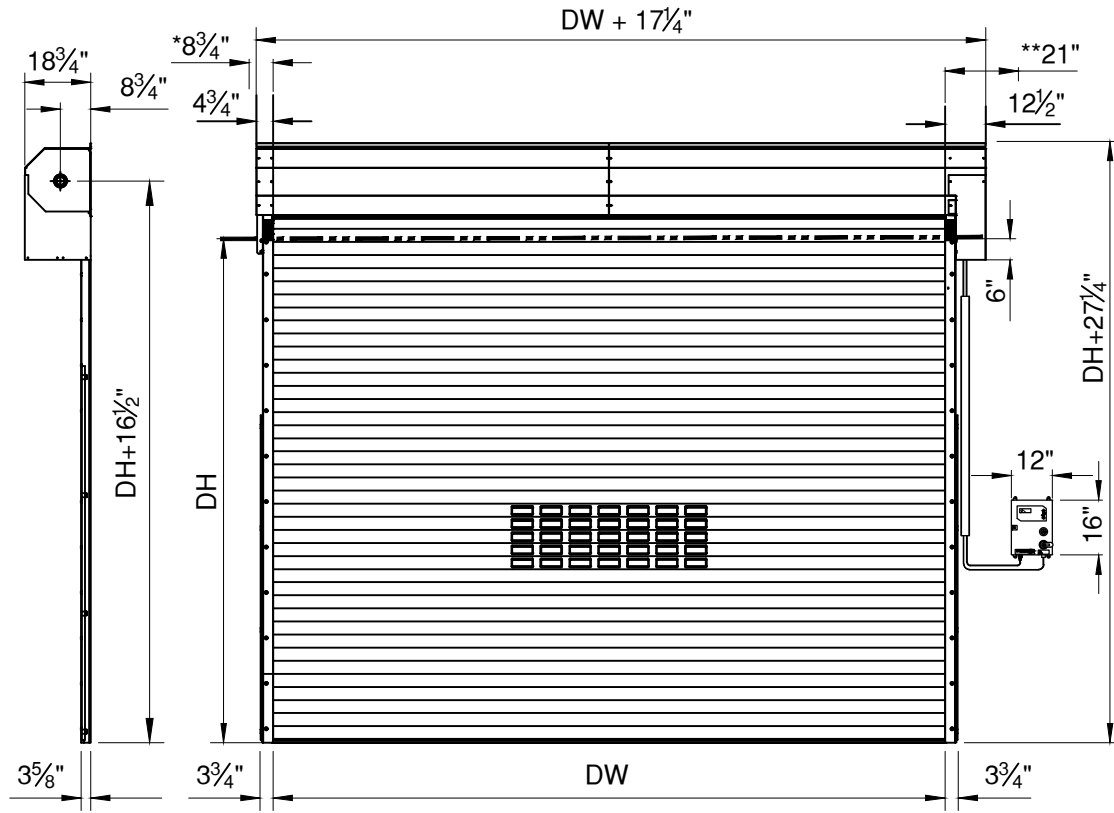

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE

HÖRMANN

117 STARPOINTE BOULEVARD
BURGETTSTOWN, PA 15021-9506

PH: +1 (800) 365-3667 FAX: 724.385.9151
www.hormann.us

HIGH PERFORMANCE DOOR SPECIFICATIONS

MODEL: STEEL RANGER 9000L WITH HOOD

DRAWN:

GB

DATE:

5/26/2022