


MODEL:	STEEL RANGER 9000
CUSTOMER:	-
ADDRESS:	-
CITY & STATE:	-
JOB:	-
LOCATION:	-
COMPANY:	-


SIZE:	DW= -	DH= -		
MOTOR LOCATION:	RIGHT	LEFT		
CONTROL BOX LOCATION:	RIGHT	LEFT		
CONTROL BOX TYPE:	3PHASE			
VOLTAGE:	1208V	230-240V	360-480V	2575V
WIRING:		NXT		
VISION AREA:				
WINDOWS:	QTY. OF SLATS	STARTING AT		
VENTED:	QTY. OF SLATS	STARTING AT		
OPTIONS:				
1 BUTTON PUSH STATION				-
INDUCTION LOOP SYSTEM				-
RADAR MOTION SENSOR				-

NOTES:

- 1.) STEP UP TRANSFORMER REQUIRED FOR SUPPLY VOLTAGES LESS THAN 230VAC (TO A MINIMUM OF -5%).
- 2.) STEP DOWN TRANSFORMER REQUIRED FOR SUPPLY VOLTAGES GREATER THAN 480VAC (TO A MAXIMUM OF +5%).
- 3.) TRANSFORMER OPTIONAL

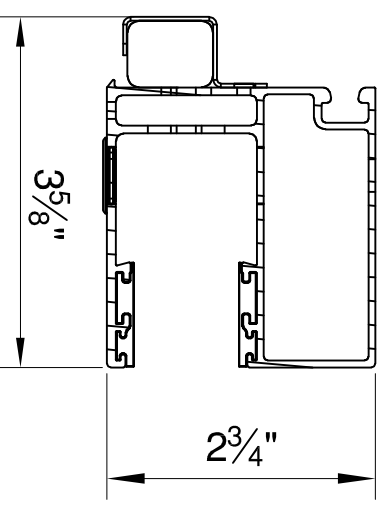

TRACK DETAIL

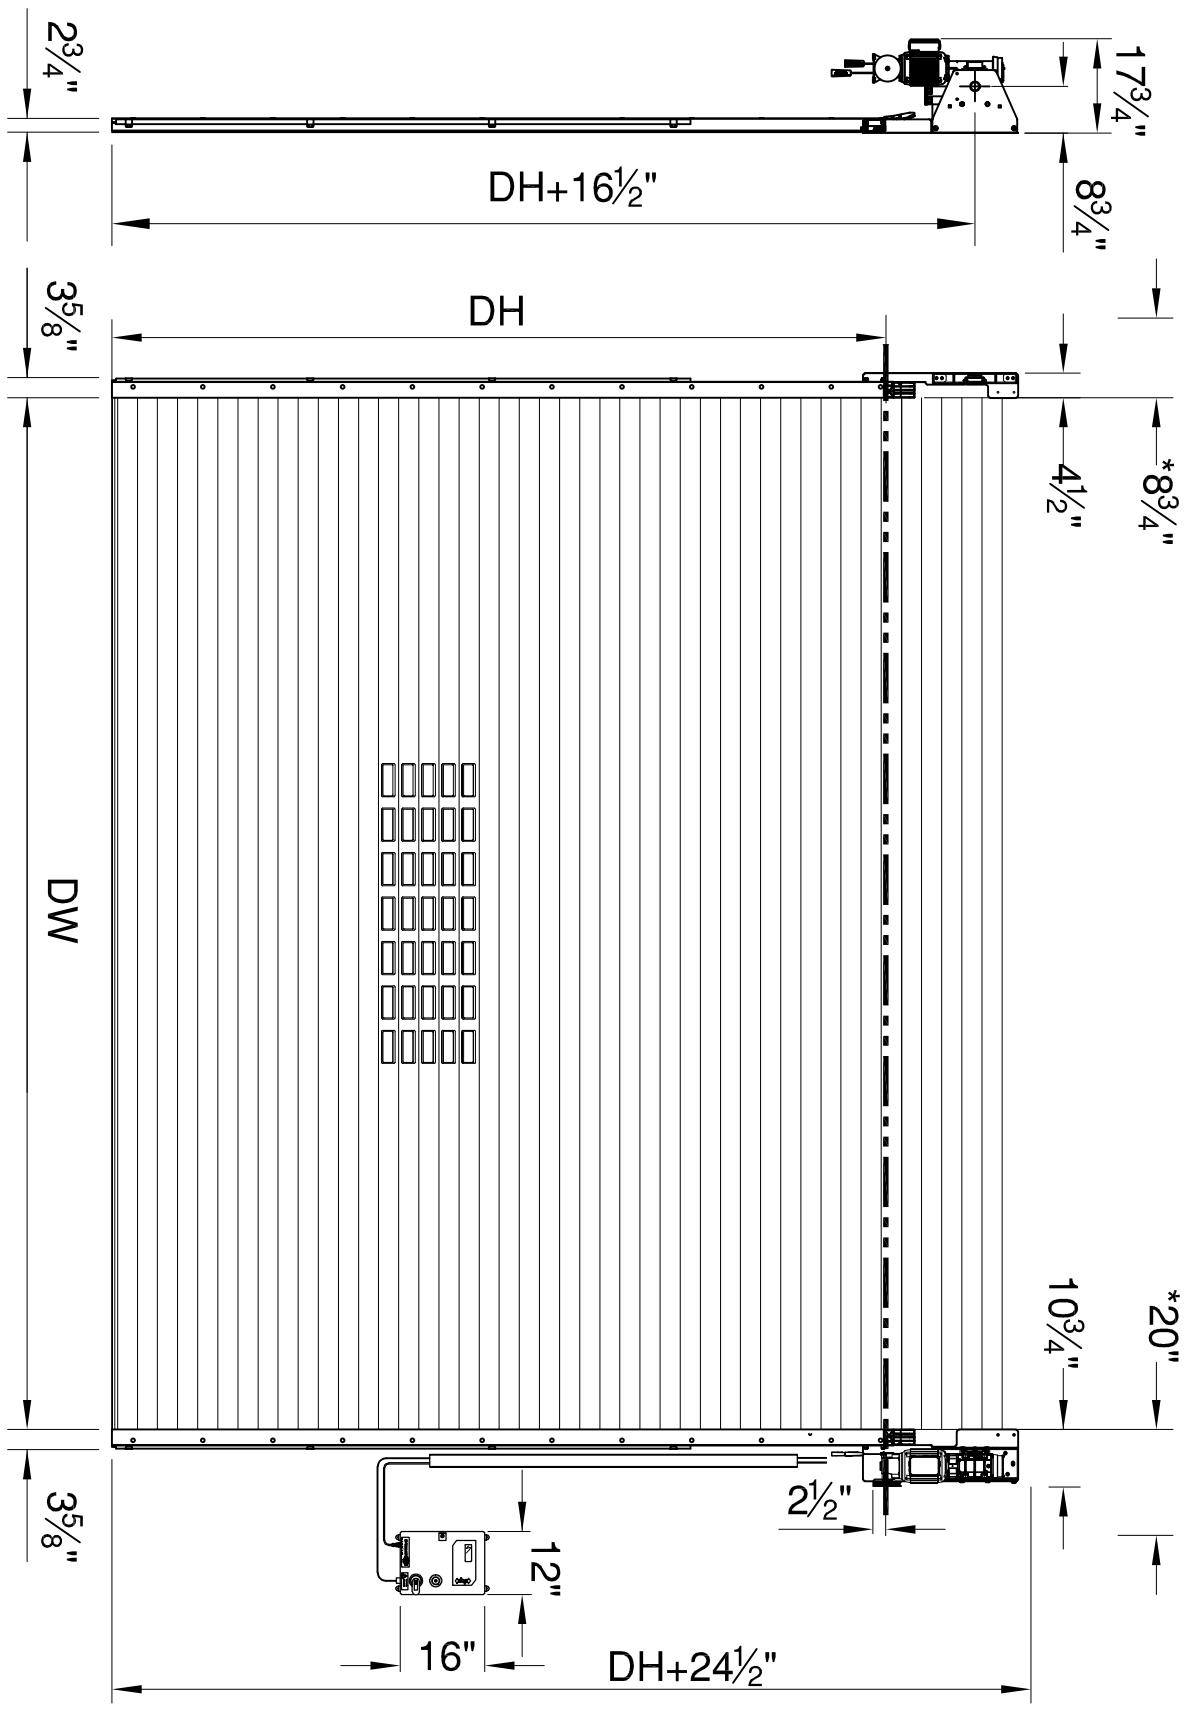

ALL DIMENSIONS ARE IN INCHES.
 * NECESSARY SPACE REQUIREMENT FOR MAINTENANCE.
 CONTROL BOX PROJECTION IS 6 INCHES.
 DRAWING SHOWN RIGHT HAND, LEFT HAND OPPOSITE.

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE

HÖRMANN			
117 STARPOINTE BOULEVARD BURGETTSTOWN, PA 15021-9506 PH: +1 (800) 365-3667 FAX: 724.385.9151 www.hormann.us			
HIGH PERFORMANCE DOOR SPECIFICATIONS			
MODEL:	STEEL RANGER 9000L		
DRAWN:	GJB	DATE:	10/6/2022