
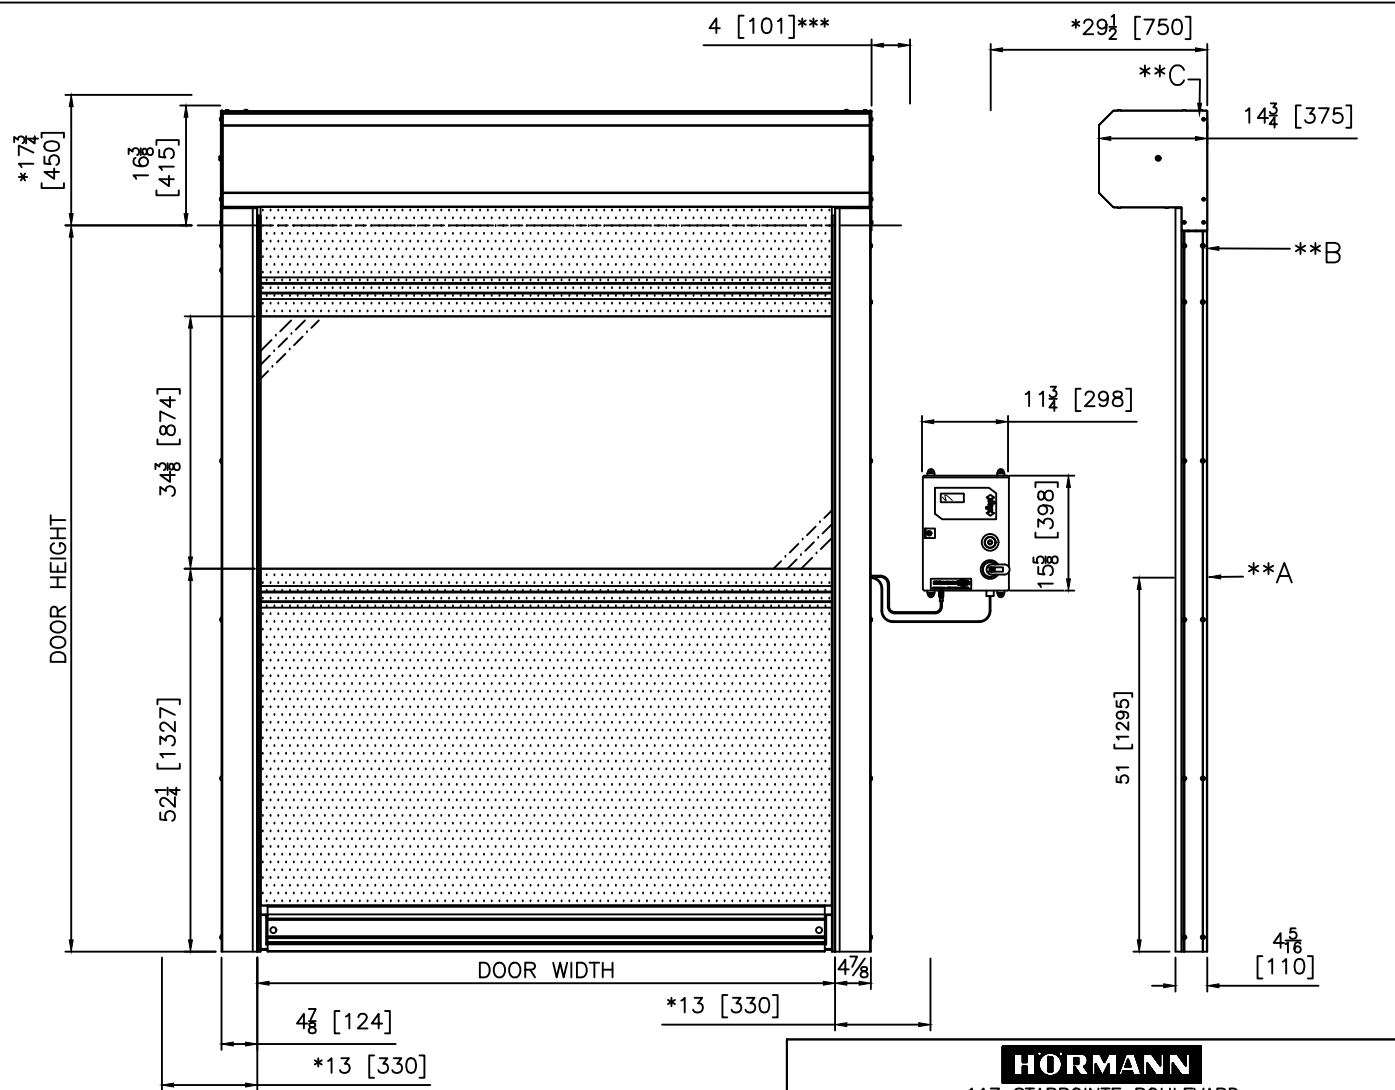


MODEL: SC1500SEL 2.0 ALUMINUM BOTTOM	
CUSTOMER: -	
ADDRESS: -	
CITY & STATE: -	
JOB: -	
LOCATION: -	
COMPANY: -	
SIZE: DW=	DH=
CABLE OUTLET:	A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/>
CONTROL BOX LOCATION:	RIGHT <input type="checkbox"/> LEFT <input type="checkbox"/>
VOLTAGE:	208V <input type="checkbox"/> 230-240V <input type="checkbox"/> 480V <input type="checkbox"/> 575V <input type="checkbox"/>
WIRING:	NXT <input type="checkbox"/> X <input type="checkbox"/>
VISION AREA:	
# OF VISION PANELS:	- STARTING AT -"
# OF PERFORATED PANELS:	- STARTING AT -"
OPTIONS:	
3 BUTTON PUSH STATION	-
INDUCTION LOOP	-
MOTION DETECTOR	-
NOTES:	

1.) STEP DOWN TRANSFORMER REQUIRED FOR SUPPLY VOLTAGES GREATER THAN 480VAC (TO A MAXIMUM OF 5%).

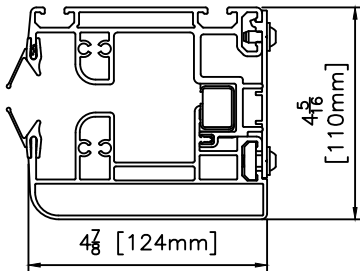

ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].

*FITTING CLEARANCE.

** POSSIBLE CABLE OUTLET POSITION

*** EMERGENCY OPENING CLEARANCE (RH OPERATOR SHOWN)

CONTROL BOX PROJECTION IS 11 INCHES [152].

DRAWING SHOWN RIGHT HAND "A", LEFT HAND OPPOSITE.

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE

HORMANN

117 STARPOINTE BOULEVARD
BURGETTSTOWN, PA 15021-9506
PH: +1 (800) 365-3667 FAX: 724.385.9151
www.hormann.us

TITLE: HIGH PERFORMANCE DOOR SPECIFICATIONS		
MODEL: SC1500SEL 2.0 ALU	PART #:	
DRAWING #:	PAPER SIZE:	
PAGE:	SCALE:	
QTY:	ENGINEER: GJB	DRAWN: 5/23/2022