



# SG 5040 TURBOLUX

**NEW.** Our fastest non-contact coiling door with maximum transparency

**HÖRMANN**

# SG 5040 TurboLux

## Non-contact coiling door with maximum transparency


With an opening speed of up to 138 inches per second, Hörmann innovation brings you the the fastest coiling door in the world. Fast opening minimizes operating costs, as waiting times in front of the door are reduced and logistic processes are accelerated.

The high-speed door has a transparency of approx. 90% of the door curtain. The impact-resistant polycarbonate sections are very robust and withstand the demands of rough everyday industrial use. Thanks to the internal, particularly powerful drive and the very narrow side guides, the new high-speed door from Hörmann needs just under 11" for lateral installation. The new operator guarantees a service life on the drive of more than 1,000,000 cycles. This drastically reduces the maintenance costs, since experience has shown that springs have to be changed every 100,000 cycles. This means that the SG 5040 TurboLux is almost wear-free. The safety light curtain integrated in the side guides monitors the door curtain's closing status up to a height of 8' and meets the safety requirements according to DIN EN 13241-1.

## Equipment features

### SG 5040 TurboLux Non-Contact Coiling Door

<b>Door Size</b>	
Width Max.	16 ft
Height Max.	16 ft
<b>Speed With Standard Control</b>	
Opening Speed	Up to 138 in/sec
Closing Speed	Up to 37 in/sec
<b>Door Construction</b>	
Material	Impact-resistant polycarbonate sections divided by aluminum profiles
Slat Height	21 in
<b>Counterbalance</b>	
Standard	Counterweight - max operating speed of up to 138 in/sec
<b>Emergency Opening/Closing</b>	
Standard	Emergency hand chain
Optional	Fast automatic emergency opening via an emergency handle
<b>More Options</b>	
Hood	<b>Standard:</b> Clear polycarbonate <b>Optional:</b> Dark Gray, Blue, Red
Slats	<b>Standard:</b> Clear polycarbonate <b>Optional:</b> Dark Gray, Blue, Red

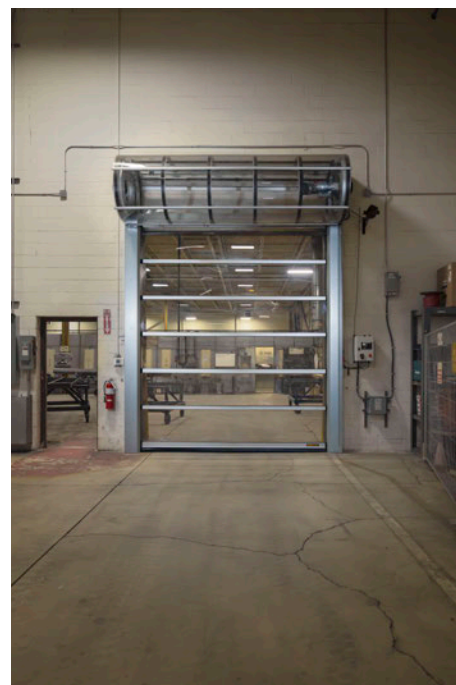

Opening speed up to  
138 in/sec

**Fast and cost-effective assembly**  
Pre-assembled upper unit saves  
time and money!

Unlike our competitor, Hörmann's innovative frameless construction of the sections allows us to achieve a total height of 21 inches / section. This allows us maximum transparency of 90%!

Follow us on social media



USA  
Toll Free: 800.365.3667  
Email: info2@hormann.us  
Website: hormann.us

Canada  
Toll Free: 866.792.9968  
Email: info@hormann.ca  
Website: hormann.ca



We reserve the right to change specifications without notice. ©Hörmann (Issue 01.2024)