



5&2
WARRANTY
YEAR

SPEED-COMMANDER™ 1400 SEL¹⁹
Clean-Master 20 Pa


HÖRMANN

Speed-Commander™ 1400 SEL¹⁹ Clean-Master 20 Pa

Clean rooms in pharmaceutical and other sanitary applications


Features

Application	Interior
Model / Classification	1400 SEL¹⁹ Clean-Master 20 Pa / Fabric
Option	50 Pa rated door. Consult factory
Size range	Maximum 10'0" w X 10'0" h (A hood may be required depending on location. Consult factory)
Technology	Direct-drive, sectional panel
Operating speed	Opening 80" IPS Closing 30" IPS
Panel	Patented, sectional design, heavy-duty aluminum hinge profiles Optional: One-piece with spring steel stiffeners inside welded / sealed pockets (is not 20 Pa rated) Panel: reinforced, puncture resistant 58 oz. PVC material Colors: orange, blue, yellow, red, gray and white
Vision	One full-width, clear PVC starting approximately 52" off floor
Custom panel imprints	Logos, photos or text digitally printed onto panel. UV treated and waterproof. Maximum image size 7'0" wide X 3'0" high
Resistance to wind load	Consult factory
Guide tracks	12 ga. galvanized steel with removable cover 6" wide X 3-1/2" projection Optional: Stainless steel
Hoods	Optional: Galvanized steel or stainless steel
Safety	8'0" high light curtain built into guide tracks
Control	Smart Start™ NXT NEMA 4X UL 208 to 575 v / 3-phase / 60 Hz voltage input Optional: Smart Start™ NXT NEMA 4X UL 1-phase available Smart Start™ NXT HFCB NEMA 3 Non-UL 1-phase consult factory
Activation options	Push button / Pull cord / Motion detector / Presence detector Induction loop detector (wire/sealant by others) / Remote control Touchless switch (several models) Consult factory for additional options
Accessories	LED Lite-Advance / ScanProtect / Wireless Crash Alert / Remote Keypad / Energy Analysis Report
Emergency	Hand crank Optional: chain hoist Optional: UPS emergency battery pack Non-UL (With HFCB 1-phase control box only)
Compliance	Door complies with requirements of UL325
Warranty	5 & 2 Year: Motor/gearbox (excluding catch) and panel material 5 years, materials & workmanship. All other mechanical and electrical components free from defects, 2 years

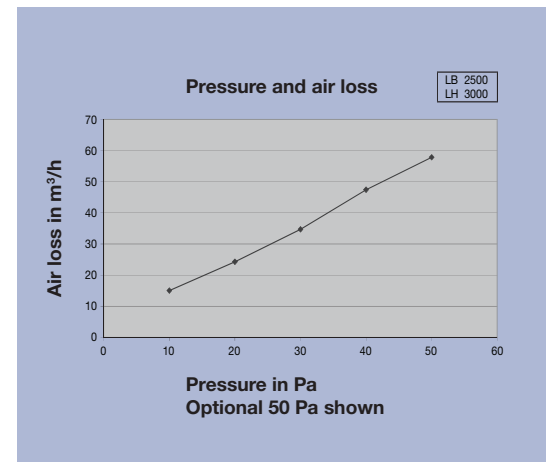

Tight seal prevents contamination between areas

The Clean-Master 20 Pa tightly seals to prevent air movement, and the fast opening speed of 80 IPS increases protection from contamination between two areas. The standard panel has horizontal aluminum profiles. A one-piece welded panel is optional.

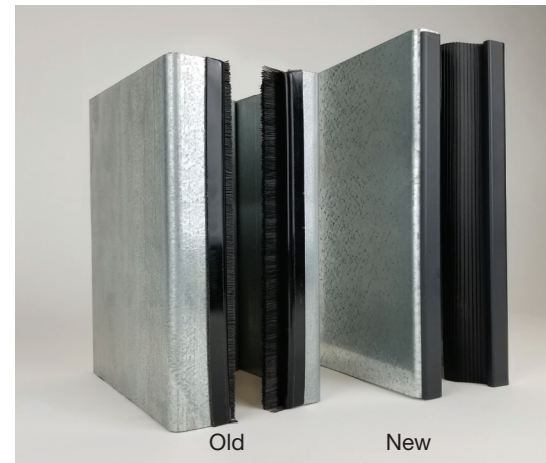

Extremely compact guide tracks

Extremely compact, heavy-duty guide tracks fit into any application. Overall dimensions: 6" wide X 3-1/2" projection. Low-profile steel guide tracks are free of moving parts, promoting a pure environment. Stainless steel guide tracks are available for customers who demand the ultimate in clean.

USA

Toll Free: 800.365.3667
Email: info2@hormann.us
Website: hormann.us

Canada

Toll Free: 866.792.9968
Email: info@hormann.ca
Website: hormann.ca

