



SPEED-COMMANDER™ 1400 SEL¹⁹ COOL-MASTER

High performance door ideal for cooler applications
Interior door openings up to 14'0" w x 16'0" h

Speed-Commander™ 1400 SEL¹⁹ Cool-Master

Cooler door openings up to 14'0" w x 16'0" h

Features

| | |
|---|---|
| Application | Interior |
| Model / Classification | 1400 SEL ¹⁹ Cool-Master / Fabric |
| Size range | Maximum 14'0" w X 16'0" h (A hood may be required depending on location. Consult factory) |
| Technology | Direct-drive, sectional panel |
| Operating speed | Opening 80" IPS Closing 30" IPS |
| Panel | Patented, sectional design, heavy-duty aluminum hinge profiles Panel: reinforced, puncture resistant 3 mm thick foam material Color: gray |
| Thermal insulation U-value (metric) in W/(m ² ·K) U-value (imperial) in BTU/(h·ft ² ·°F) | Consult factory |
| Vision | One full-width, clear PVC starting approximately 52" off floor |
| Custom panel imprints | Logos, photos or text digitally printed onto panel UV treated and waterproof. Maximum image size 7'0" wide X 3'0" high |
| Resistance to wind load | Consult factory |
| Guide tracks | 12 ga. galvanized steel with removable cover 6" wide X 3-1/2" projection Optional: Stainless steel |
| Hoods | Optional: Galvanized steel or stainless steel |
| Safety | 8'0" high light curtain built into guide tracks |
| Control | Smart Start™ NXT NEMA 4X UL 208 to 575 v / 3-phase / 60 Hz voltage input Optional: Smart Start™ NXT NEMA 4X UL 1-phase available Smart Start™ NXT HFCB NEMA 3 Non-UL 1-phase consult factory |
| Activation options | Push button / Pull cord / Motion detector / Presence detector Induction loop detector (wire/sealant by others) / Remote control Touchless switch (several models) Consult factory for additional options |
| Accessories | LED Lite-Advance / SmartControl M2M / ScanProtect / Wireless Crash Alert / Remote Keypad / Energy Analysis Report |
| Emergency | Hand crank. Optional: chain hoist Optional: UPS emergency battery pack Non-UL (With HFCB 1-phase control box only) |
| Compliance | Door complies with requirements of UL325 |
| Warranty | 5 & 2 Year: Motor/gearbox (excluding catch) and panel material 5 years, materials & workmanship. All other mechanical and electrical components free from defects, 2 years |




Foam panel for optimum energy savings

An advanced 3 mm thick gray foam panel material maintains flexibility to +33° F and helps to keep condensation to a minimum in cooler to ambient areas. Our unique sectional panel design makes it possible to replace panels easily for minimal downtime.



Optional Vision Panel

Maximize visibility with our optional full-width, clear PVC starting approximately 52" off the floor.

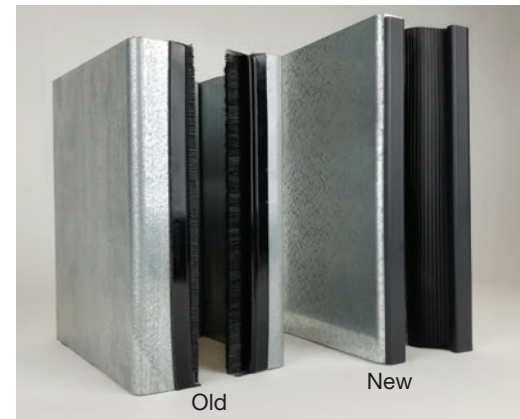

Extremely compact guide tracks

Extremely compact, heavy-duty guide tracks fit into any application. Overall dimensions: 6" wide X 3-1/2" projection. Stainless steel guide tracks are available for customers who demand the ultimate in clean.



Connect with us!



Hörmann • Starpointe Business Park • 117 Starpointe Boulevard • Burgettstown, PA 15021-9506
Phone: 800.365.3667 • 724.385.9150 • Fax: 724.385.9151 • www.hormann.us • Email: info2@hormann.us

We reserve the right to change specifications without notice. ©Hörmann Flexon LLC (Issue 05.2021)