



Optional one-piece panel shown

Speed-Commander™ 1400 SEL¹⁹ Food-Master

High performance door for the food industry
Interior door openings up to 14'0" w x 16'0" h



Speed-Commander™ 1400 SEL¹⁹ Food-Master

Stainless steel options meet all requirements

Features


Application	Interior
Model / Classification	1400 SEL ¹⁹ Food-Master / Fabric
Size range	Maximum 14'0" w X 16'0" h
Technology	Direct-drive, sectional panel
Operating speed	Opening 80" IPS Closing 30" IPS
Panel	Patented, sectional design, heavy-duty aluminum hinge profiles Optional: One-piece with spring steel stiffeners inside welded / sealed pockets Material: <ul style="list-style-type: none"> • 58 oz. / sq. yard, nylon-reinforced, puncture resistant PVC is FDA compliant (colors: white, grey, yellow, orange, red or blue). • 90 oz. / sq. yard polyurethane is 100 percent FDA approved (colors: white or blue) Vision is unavailable with 90 oz. material to maintain FDA approval.
Thermal insulation U-value (metric) in W/(m ² ·K) U-value (imperial) in BTU/(h·ft ² ·°F)	Consult factory
Vision	One full-width, clear PVC starting approximately 52" off floor
Custom panel imprints	Logos, photos or text digitally printed onto panel UV treated and waterproof. Maximum image size 7'0" wide X 3'0" high
Resistance to wind load	Consult factory
Guide tracks	12 ga. galvanized steel with removable cover 6" wide X 3-1/2" projection Optional: Stainless steel
Hoods	Optional: Galvanized steel or stainless steel
Safety	8'0" high light curtain built into guide tracks
Control	Smart Start™ NXT NEMA 4X UL 208 to 575 v / 3-phase / 60 Hz voltage input Optional: Smart Start™ NXT NEMA 4X UL 1-phase available Smart Start™ NXT HFCB NEMA 3 Non-UL 1-phase consult factory
Activation options	Push button / Pull cord / Motion detector / Presence detector Induction loop detector (wire/sealant by others) / Remote control Touchless switch (several models) Consult factory for additional options
Accessories	LED Lite-Advance / SmartControl M2M / ScanProtect Wireless Crash Alert / Remote Keypad / Energy Analysis Report
Emergency	Hand crank. Optional: chain hoist Optional: UPS emergency battery pack Non-UL (With HFCB 1-phase control box only)
Compliance	Door complies with requirements of UL325
Warranty	5 & 2 Year: Motor/gearbox (excluding catch) and panel material 5 years, materials & workmanship. All other mechanical and electrical components free from defects, 2 years



Optional one-piece panel shown

Choose only the stainless steel components required

Design a Food-Master door choosing only stainless options the application requires: Roll tube / shaft, motor cover, guide tracks and all hardware.

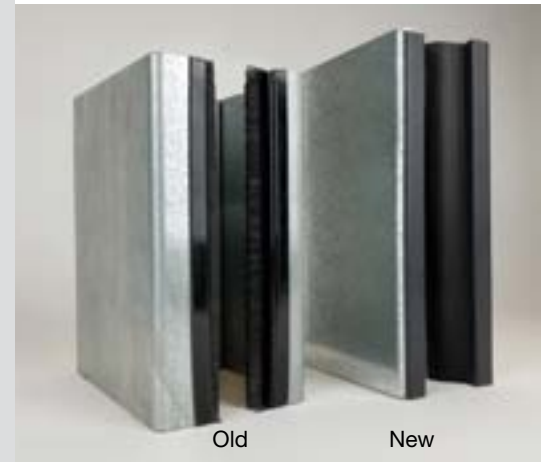

New in 2019 – Extremely compact guide tracks

Extremely compact, heavy-duty guide tracks fit into any application. Overall dimensions: 6" wide X 3-1/2" projection. Low-profile steel guide tracks are free of moving parts, promoting a pure environment. Stainless steel guide tracks are available for customers who demand the ultimate in clean.



Connect with us!



Hörmann Flexon LLC • Starpointe Business Park • 117 Starpointe Boulevard • Burgettstown, PA 15021-9506

Phone: 800.365.3667 • 724.385.9150 • Fax: 724.385.9151 • www.hormann.us • Email: info2@hormann.us

We reserve the right to change specifications without notice. ©Hörmann Flexon LLC (Issue 05.2021)