



Speed-Commander™ 1400 SEL¹⁹ High Performance Door

Fast opening speed of 80" / second, built-in light curtain, quiet operation
Interior door openings up to 14'0" w x 16'0" h

HÖRMANN

Speed-Commander™ 1400 SEL¹⁹

Latest technology for interior openings up to 14'0" w x 16'0" h


Features

Application	Interior
Model / Classification	1400 SEL ¹⁹ / Fabric
Size range	Maximum 14'0" w X 16'0" h
Technology	Direct-drive, sectional panel
Operating speed	Opening 80" IPS Closing 30" IPS
Panel	Patented, sectional design, heavy-duty aluminum hinge profiles Panel: reinforced, puncture resistant 58 oz. PVC material Colors: orange, blue, yellow, red, gray and white
Vision	One full-width, clear PVC starting approximately 52" off floor
Custom panel imprints	Logos, photos or text digitally printed onto panel. UV treated and waterproof. Maximum image size 7'0" wide X 3'0" high
Resistance to wind load	Consult factory
Guide tracks	12 ga. galvanized steel with removable cover 6" wide X 3-1/2" projection Optional: Stainless steel
Hoods	Optional: Galvanized steel or stainless steel
Safety	8'0" high light curtain built into guide tracks
Control	Smart Start™ NXT NEMA 4X UL 208 to 575 v / 3-phase / 60 Hz voltage input Optional: Smart Start™ NXT NEMA 4X UL 1-phase available Smart Start™ NXT HFCB NEMA 3 Non-UL 1-phase consult factory
Activation options	Push button / Pull cord / Motion detector / Presence detector Induction loop detector (wire/sealant by others) / Remote control Touchless switch (several models) Consult factory for additional options
Accessories	LED Lite-Advance / SmartControl M2M / ScanProtect / Wireless Crash Alert / Remote Keypad / Energy Analysis Report
Emergency	Hand crank Optional: chain hoist Optional: UPS emergency battery pack Non-UL (With HFCB 1-phase control box only)
Compliance	Door complies with requirements of UL325
Warranty	5 & 2 Year: Motor/gearbox (excluding catch) and panel material 5 years, materials & workmanship. All other mechanical and electrical components free from defects, 2 years



Sectional panel with 58 oz. panel material

Horizontal aluminum profiles or spring steel wind ribs inside sewn pockets (optional) provide panel stability for light amounts of air pressure with the door in static position. A full-width vision area provides maximum visibility, and a SoftEdge bottom allows for self-repairing upon accidental impact. An aluminum bottom bar with breakaway tabs is optional for applications having slightly more air pressure.

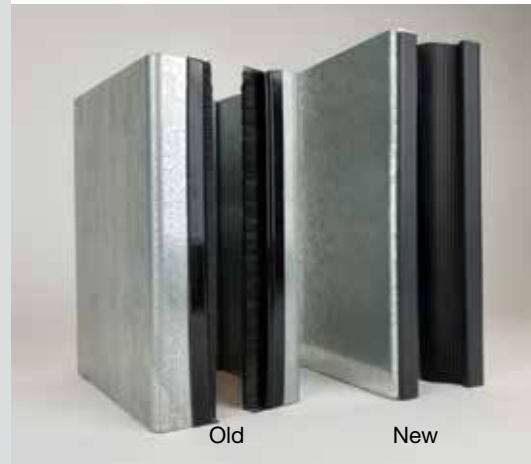

New in 2019 – Extremely compact guide tracks

Extremely compact, heavy-duty guide tracks fit into any application. Overall dimensions: 6" wide X 3-1/2" projection.



Connect with us!



Hörmann Flexon LLC • Starpointe Business Park • 117 Starpointe Boulevard • Burgettstown, PA 15021-9506

Phone: 800.365.3667 • 724.385.9150 • Fax: 724.385.9151 • www.hormann.us • Email: info2@hormann.us

We reserve the right to change specifications without notice. ©Hörmann Flexon LLC (Issue 05.2021)