
MODEL: SM1600 L_19 XL W/ SLOPED HOOD					
CUSTOMER: -					
ADDRESS: -					
CITY & STATE: -					
JOB: -					
LOCATION: -					
COMPANY: -					


SIZE: DW=-	- DH=	= -							
MOTOR LOC	ATION:	F	RIGHT				LE	FT	
CONTROL BO	OX LOCATIO	N: F	RIGHT				LE	FT	
CONTROL BO	OX TYPE:	TYPE: 1PHASE _ 3PHAS			SE				
VOLTAGE:	LTAGE: 200-240V				360-480V				
WIRING:							ΝX	⟨T	
PANEL COLC	R: BL	UE _	OR	RANGE BL			BLA	CK	
	GR	EY _							
VISION AREA	ISION AREA: CLEAR PVC NONE NONE								
OPTIONS:									
1 BUTTON PU	JSH STATIC	N						Γ-	
INDUCTION LOOP SYSTEM						-			
RADAR MOTI	ION SENSOI	R							
NOTES:									



ALL DIMENSIONS ARE IN INCHES.

* NECESSARY SPACE REQUIREMENT FOR MAINTENANCE.
CONTROL BOX PROJECTION IS 6 INCHES.
DRAWING SHOWN RIGHT HAND, LEFT HAND OPPOSITE.

*NOTE: GEARBOX HEATER WITH DEDICATED 110VAC POWER SOURCE REQUIRED FOR APPLICATIONS < 40°F

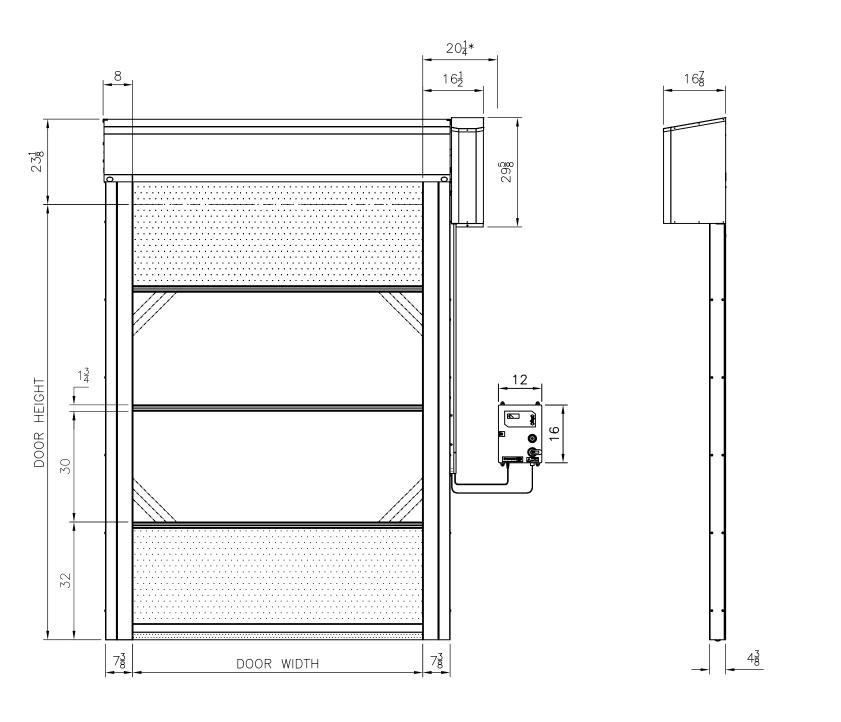

HORMANN

117 STARPOINTE BOULEVARD
BURGETTSTOWN, PA 15021-9506
PH: +1 (800) 365-3667 FAX: 724.385.9151
www.hormann.us

TITLE: SM	1600 L _19 XL W/ :	SLOPED HOOD				
MODEL: SM	1600 L _19 XL	PART #:				
DRAWING #:		PAPER SIZE:				
PAGE:		SCALE:				
QTY:	ENGINEER: GJB	DRAWN: 8/27/2019				

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE