



Speed-Master® 1600 XL¹⁹ High Performance Door

Practical choice for large openings, NEMA 4X Smart Start™ NXT control box, built-in light curtain
Interior or exterior door openings up to 20'0" w x 20'0" h


HÖRMANN

Speed-Master® 1600 XL¹⁹

Competitively priced for openings up to 20'0" w x 20'0" h

Features

Application	Interior or exterior
Model / Classification	1600 XL ¹⁹ / Fabric
Size range	Maximum 20'0" w X 20'0" h
Technology	Direct-drive, sectional panel
Operating speed	Opening 48" IPS Closing 30" IPS
Panel	Patented, sectional design, heavy-duty aluminum hinge profiles Panel: reinforced, puncture resistant 58 oz. PVC material Colors: orange, blue, yellow, red, gray and white
Vision	Two full-width, clear PVC starting approximately 36" off floor
Custom panel imprints	Logos, photos or text digitally printed onto panel. UV treated and waterproof. Maximum image size 7'0" wide X 3'0" high
Resistance to wind load	Consult factory
Guide tracks	12 ga. galvanized steel 7-3/8" wide X 4-3/8" projection Optional: Windlocks
Hoods	Optional: Galvanized steel or stainless steel
Safety	8'0" high light curtain built into guide tracks
Control	Smart Start™ NXT NEMA 4X UL 208 to 575 v / 3-phase / 60 Hz voltage input Optional: Step-up transformer Optional: Smart Start™ NXT NEMA 4X UL 1-phase available Smart Start™ NXT HFCB NEMA 3 Non-UL 1-phase consult factory
Activation options	Push button / Pull cord / Motion detector / Presence detector Induction loop detector (wire/sealant by others) / Remote control Touchless switch (several models) Consult factory for additional options
Accessories	LED Lite-Advance / SmartControl M2M / ScanProtect Wireless Crash Alert / Remote Keypad / Energy Analysis Report
Emergency	Chain hoist Optional: Hand crank Optional: UPS emergency battery pack Non-UL (With HFCB 1-phase control box only)
Compliance	Door complies with requirements of UL325
Warranty	5 & 2 Year: Motor/gearbox (excluding catch) and panel material 5 years, materials & workmanship. All other mechanical and electrical components free from defects, 2 years

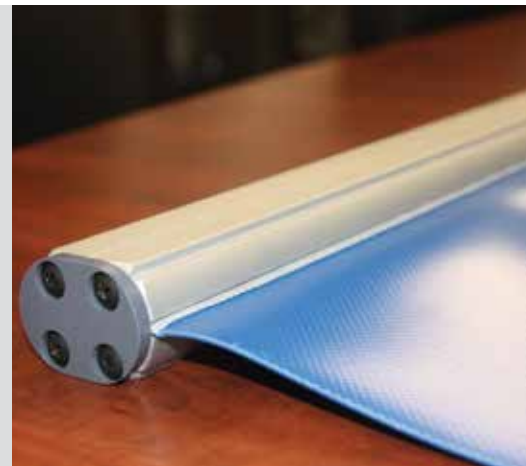

Sectional panel with aluminum windbar for panel stability

An aluminum bottom bar with breakaway tabs breaks out of the guide tracks if accidental impact occurs. Panel windlocks are optional for added wind pressure resistance. (Windlocks disable the breakaway function.)



New in 2019 – Two piece guide tracks

Heavy-duty two-piece guide tracks with brush seal fit into any application. Overall dimensions: 7-3/8" wide X 4-3/8" projection.



Connect with us!



Hörmann Flexon LLC • Starpointe Business Park • 117 Starpointe Boulevard • Burgettstown, PA 15021-9506

Phone: 800.365.3667 • 724.385.9150 • Fax: 724.385.9151 • www.hormann.us • Email: info2@hormann.us

We reserve the right to change specifications without notice. ©Hörmann Flexon LLC (Issue 05.2021)