


HÖRMANN SERIES 200 "F-HEADER" DOCK SEAL

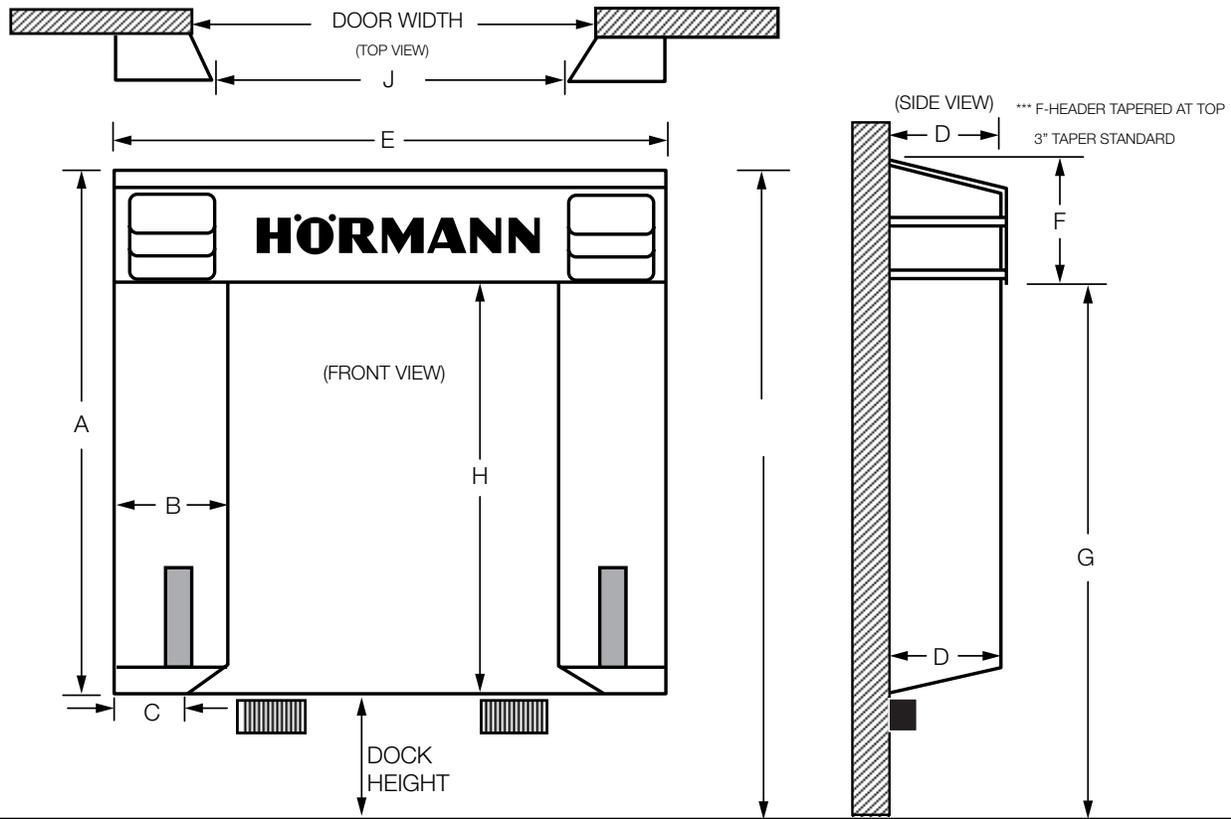

DOCK AND DOOR INFORMATION
 (Please use inches as unit of measure)

_____ Quantity
 _____ W X _____ H Door Size
 _____ Dock Height
 _____ Dock Bumper Projection
 Step Or Ledge On Back Of Trailers ___Yes___ No
 Are Yard Jockeys Being Used? ___Yes___ No
 Dock Approach: Level ___Decline___ Incline ___
Slope Measured As Rise Over Run In 53'0"
(Change in Slope Expressed In Inches Or %)
 Distance Between Doors _____
 Clearance Above Doors _____
 Clearance Beside Doors _____
 Foundation Wall: Flush ___Projection___
 Recessed (Typical Of Metal Bldg.) _____
 Truck Height Being Loaded:
 Lowest _____ Highest _____
 Wall Construction:
 Concrete ___ Block ___ Metal ___ Other _____

OPTIONAL FEATURES:

Full Height Guide Stripe: ___Yes___ No
 Wear Pleats: ___Yes___ No
 Wear Pleat Material: _____
 Exposure: ___ 4" ___ 8" ___ 16"

DOCK SEAL INFORMATION

Model _____ Cover Material _____
 A. _____ Side Pad Length
 B. _____ Side Pad Face Width
 C. _____ Side Pad Backboard Width
 D. _____ Projection: Top _____ Bottom _____
 E. _____ F-Header Curtain Width
 F. _____ F-Header Drop
 (Up To 30" Standard)
 ***See Note On Standard Taper On F Header
 G. _____ F-Header Drop-Off Ground
 H. _____ F-Header Drop-Off Dock Floor
 I. _____ Unit Height Off Ground
 J. _____ Distance Between Side Pads At Face (7'8" Std.)

NOTE: UNIT MUST PROJECT 6" BEYOND DOCK BUMPERS

F-HEADER OPTIONS:

Velcro Splits With Backer Flap: Yes ___ No ___
 Rope Pull-Up: Yes ___ No ___
 Foam In F-Header Face:
 None Std. ___ 1" ___ 4" ___
 Rain Gutter On F-Header Edge: Yes ___ No ___
 Metal Hood: Yes ___ Unit Width _____
 Hood Projection: 18" ___ 24" ___ 30" ___ 36" ___
 Special Instructions: _____